


LifeSmart

Triac Dimmer Switch

User Guide V1.0

Model: LS223WH/BL/GD etc.

ILLUSTRATION

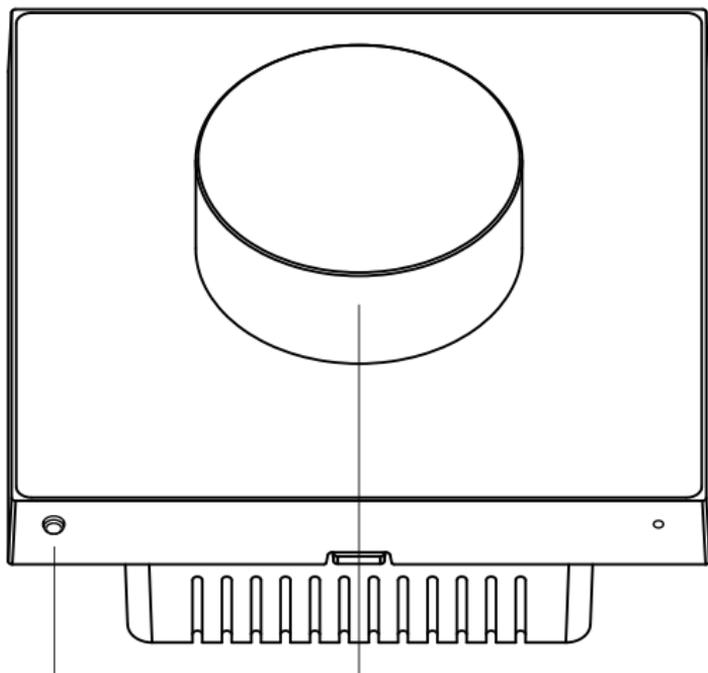

Pair button

Press 5s to enter pairing mode

Press 20s to unpair & restore factory

Dimming knob

Rotate to adjust brightness

Press to turn ON/OFF

SPECIFICATIONS

Size Outside the wall: 86*86*28mm

Overall: 86*86*53mm

Weight 135g

Power consumption <0.6W

Input AC 100-240V~ 50/60Hz

Maximum load Resistive load 350W

Capacitive load 200VA


Wireless protocol CoSS

Wireless distance 200m(open field)


Operating temperature -5~45°C

Operating humidity 5~90%

WIRING INSTRUCTION

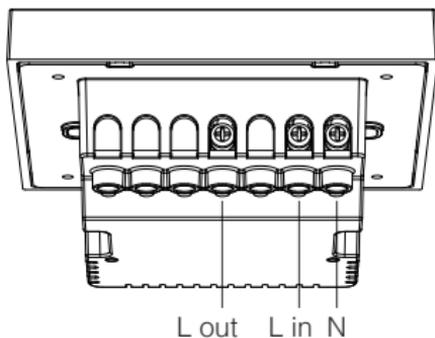

- L out: Switch-out Live Wire
- L in: Switch-in Live Wire
- N: Switch-in Neutral Wire

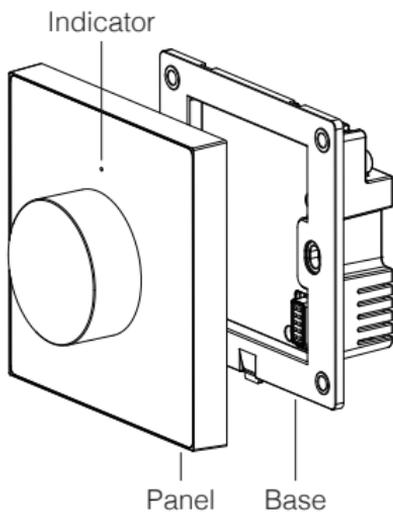

NOTE:

The panel and accessory of this product must be used together, do not separate and use them for other products.

It is recommended that the installation height does not exceed 2 meters. The installation involves high voltage and should be done by a professional electrician.

INSTALLATION

- ① Cut off the electrical power supply and make sure the wiring is not charged.
- ② Take out the base and install it according to the wiring instruction, make sure all the wires are placed firmly.
- ③ Place the wires in the cassette orderly, and fix the base to the cassette with fixing screws.
- ④ Take out the panel and fix it to the base, make sure that the upper and lower two buckles are in place, otherwise it may not be able to be used normally due to poor contact.
- ⑤ Restore the power supply, the indicator will turn on automatically.
- ⑥ After configuration of the Smart Station, choose **"Add Device"** in LifeSmart App, select **"Triac Dimmer Switch"** to enter pairing process. Follow the instruction on the app to finish pairing.

WARRANTY DESCRIPTION

Thank you for purchasing this LifeSmart product. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

User support e-mail address

support@ilifsmart.com

Website

iot.ilifsmart.com



Manufacturer: HANGZHOU LIFESMART TECHNOLOGY CO.,LTD.

Address: 22th Floor, Yuesheng International Center, 518 Pinglan Road, Xiaoshan District, Hangzhou, Zhejiang, China

ATTENTION

The following conditions are not covered by the warranty:

- Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
- Products beyond the warranty period;
- Products that have the barcode tampered with or removed;
- Devices that have been tampered with or customized outside of LifeSmart Terms Of Service as on the LifeSmart APP and website;
- User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- Product failure or damage caused by other problems except the product itself.

DECLARATION

DECLARATION OF CONFORMITY

Hereby, LifeSmart declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<http://global.ilifesmart.com/ce/docs/>



Notice: This device may be used in each member state in EU.

DISPOSAL AND RECYCLE INFORMATION

Device labelled with this symbol should not be disposed with other household wastes. It shall be handed over to the applicable collection point for the recycling of waste electrical and electronic equipment.



 Facebook: ilifesmarthome

 Twitter: ilifesmarthome

Copyright © 2022 LifeSmart Inc. All Rights Reserved. 88012300 A0