

BLEND Switch PRO(Metal)

LifeSmart

LS240-MG1/LS240-MG2/LS240-MG3/LS240-MA1/LS240-MA2/LS240-MA3/ /LS240-MR1/LS240-MR2 /
LS240-MR3/LS240-MD1 /LS240-MD2/LS240-MD3

Straightforward design, can be integrated into a variety of high-end decoration style. Micro key structure design, so that the trigger pressure is smaller, a clearer key sound. Anodic oxidation process, has the natural luster of metal, aesthetic feeling at the same time more solid, effectively protect the surface from corrosion and damage. LED backlight supports custom 16 million colors. Double light guide plate design key light transmission scheme, bring soft backlight. LifeSmart self-developed CoSS transmission technology, long transmission distance, strong anti-interference ability, high stability. It can be added to the Apple Home app through the Smart Center, and form a smart home system with 1.5 billion + Apple devices and HomKit accessories.

Highlights

- Anodic oxidation process, through CNC, metal sandblasting dozens of processes cast
- Self-developed CoSS protocol, far transmission, anti-interference, high stability
- Rebound touch technology, elastic silica gel, light rebound
- Compatible with HomeKit, the choice of 1.5 billion Apple users



Graphit



Grey



Golden



Red

BLEND Switch PRO(Metal)

LS240-MG1/LS240-MG2/LS240-MG3/LS240-MA1/LS240-MA2/LS240-MA3/LS240-MR1/LS240-MR2/LS240-MR3/LS240-MD1/LS240-MD2/LS240-MD3

LifeSmart

Spec

General

Model	LS240-MG1/LS240-MG2/LS240-MG3/ LS240-MA1/LS240-MA2/LS240-MA3/ LS240-MR1/LS240-MR2/LS240-MR3/ LS240-MD1/LS240-MD2/LS240-MD3
-------	---

Installation	In-wall concealed with 86 back box
--------------	------------------------------------

Operating Temperature	-5~45°C
-----------------------	---------

Operating Humidity	5~90%
--------------------	-------

Interface	L out 1 2 3, L in, N
-----------	----------------------

Power Supply	AC 100-240V ~ 50/60Hz
--------------	-----------------------

Static Consumption	<0.6W
--------------------	-------

Maximum Overload	Resistive load 500W Capacitive load 200VA
------------------	--

Radio

Radio protocol	CoSS
----------------	------


Signal range (open field)	200m(CoSS)
---------------------------	------------

Construction

Colour	Grey/Graphit/Golden/Red
--------	-------------------------

Dimension	Outside the wall :86*86*11mm, 整 Whole product:86*86*36mm
-----------	---

Casing	PC+ABS
--------	--------

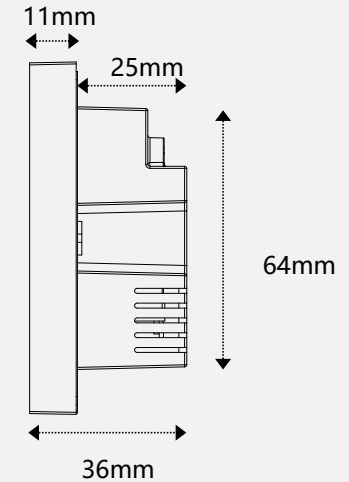

Installation

L3 Switch-out Live Wire

L2 Switch-out Live Wire

L1 Switch-out Live Wire

L Switch-in Live Wire

N Switch-in Neutral Wire

